

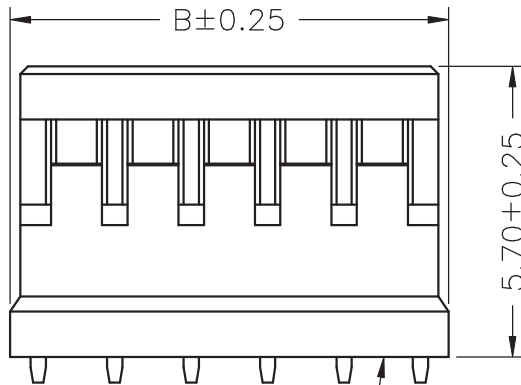
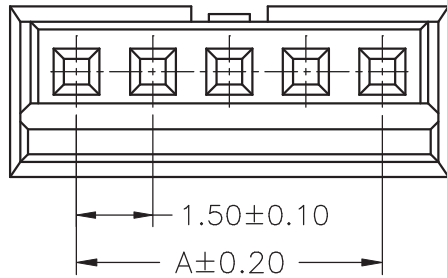
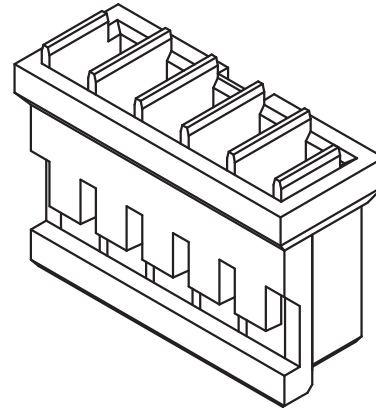


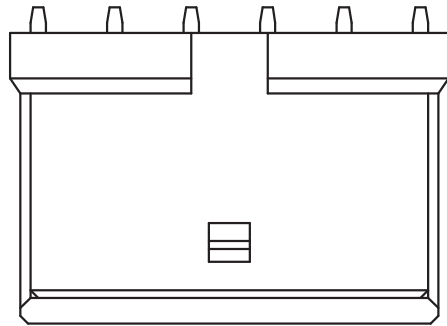

Circuit 1

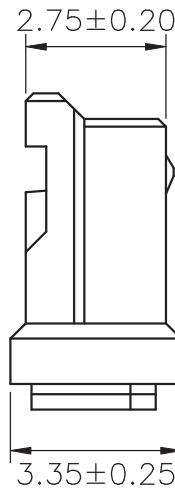

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 350V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 500V AC/minute


Material: Nylon 66,UL94V-0

Color: Natural(White)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
A1501H-02P	1.50	4.10
A1501H-03P	3.00	5.60
A1501H-04P	4.50	7.10
A1501H-05P	6.00	8.60
A1501H-06P	7.50	10.10
A1501H-07P	9.00	11.60
A1501H-08P	10.50	13.10
A1501H-09P	12.00	14.60
A1501H-10P	13.50	16.10
A1501H-11P	15.00	17.60
A1501H-12P	16.50	19.10
A1501H-13P	18.00	20.60
A1501H-14P	19.50	22.10
A1501H-15P	21.00	23.60

广瑞电子科技有限公司			
UNIT	SCALE	SHEET	TITLE:
mm		1 of 1	
DRAWN BY	SUSAN	APPROVED BY	HENLY
2001.02.01		2001.02.01	
GENERAL TOLERANCE			
X. X±0.25	ANGLE±	1.50mm PITCH HOUSING	
X. XX±0.15	▷		
X. XXX±0.05	⊕		
B0	NEW RELEASE	2006.04.13	
REV.	DESCRIPTION	DATE	
DRAW NO. : A1501H-XP			REV. B0

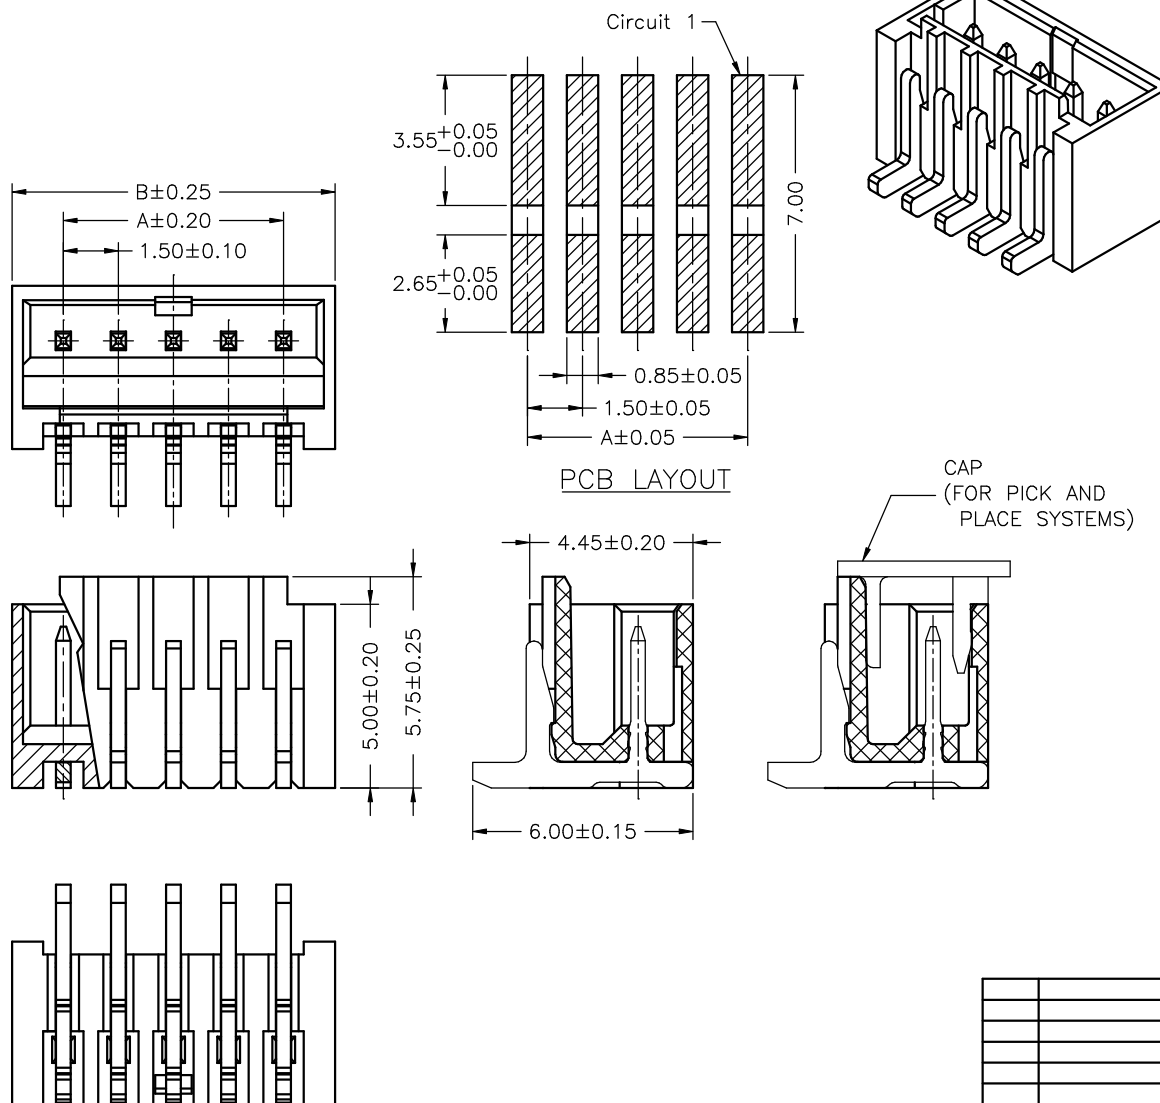

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 350V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Brass/Tin-plated






Material: Nylon 6T,UL94V-0

Color: Natural(Beige)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
A1501WV-S-02P	1.50	4.30
A1501WV-S-03P	3.00	5.80
A1501WV-S-04P	4.50	7.30
A1501WV-S-05P	6.00	8.80
A1501WV-S-06P	7.50	10.30
A1501WV-S-07P	9.00	11.80
A1501WV-S-08P	10.50	13.30
A1501WV-S-09P	12.00	14.80
A1501WV-S-10P	13.50	16.30
A1501WV-S-11P	15.00	17.80
A1501WV-S-12P	16.50	19.30
A1501WV-S-13P	18.00	20.80
A1501WV-S-14P	19.50	22.30
A1501WV-S-15P	21.00	23.80

			广瑞电子科技有限公司				
			UNIT	SCALE	SHEET	TITLE: 1.50mm PITCH 180° WAFER-SMT TYPE	
			mm		1 of 2		
			DRAWN BY SUSAN		APPROVED BY HENLY		
			2003.04.19		2003.04.19		
			GENERAL TOLERANCE				
			X. X±0.25		ANGLE±		
B0	NEW RELEASE	2006.04.13	X. XX±0.15			DRAW NO. : A1501WV-S-XP	REV. B0
REV.	DESCRIPTION	DATE	X. XXX±0.05				

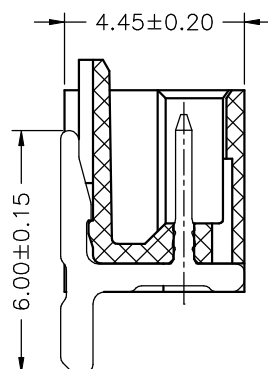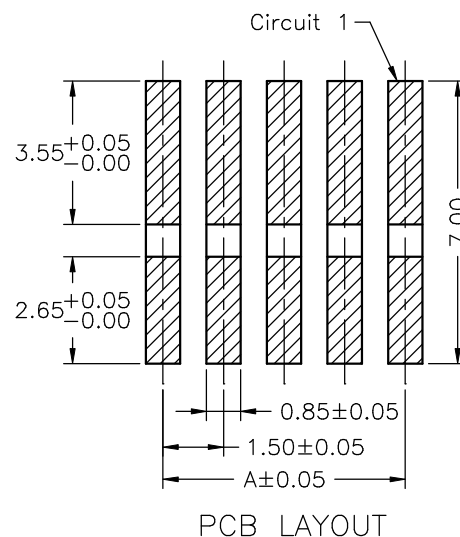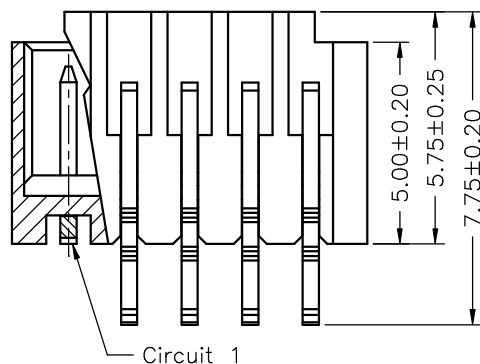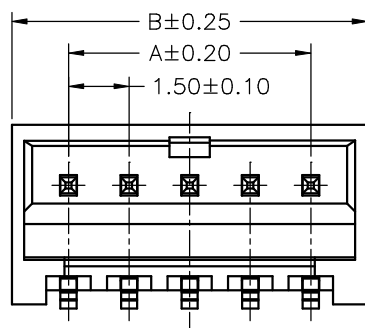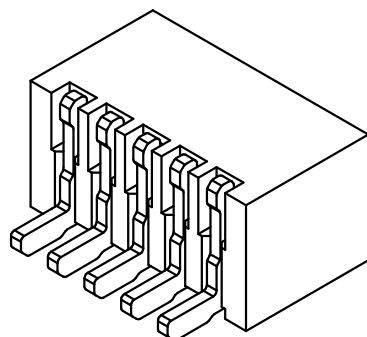

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 350V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Brass/Tin-plated

Material: Nylon 6T,UL94V-0

Color: Natural(Beige)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
A1501WR-S-02P	1.50	4.30
A1501WR-S-03P	3.00	5.80
A1501WR-S-04P	4.50	7.30
A1501WR-S-05P	6.00	8.80
A1501WR-S-06P	7.50	10.30
A1501WR-S-07P	9.00	11.80
A1501WR-S-08P	10.50	13.30
A1501WR-S-09P	12.00	14.80
A1501WR-S-10P	13.50	16.30
A1501WR-S-11P	15.00	17.80
A1501WR-S-12P	16.50	19.30
A1501WR-S-13P	18.00	20.80
A1501WR-S-14P	19.50	22.30
A1501WR-S-15P	21.00	23.80

广瑞电子科技有限公司

UNIT SCALE SHEET
mm 1 of 2

DRAWN BY
SUSAN
2003.04.19

APPROVED BY
HENLY
2003.04.19

GENERAL TOLERANCE

X. X±0.25
X. XX±0.15
X. XXX±0.05

ANGLE±
⊕

TITLE:

1.50mm PITCH
90° WAFER-SMT TYPE

DRAW NO. :
A1501WR-S-XP

REV.
B0

B0	NEW RELEASE	2006.04.13
REV.	DESCRIPTION	DATE