
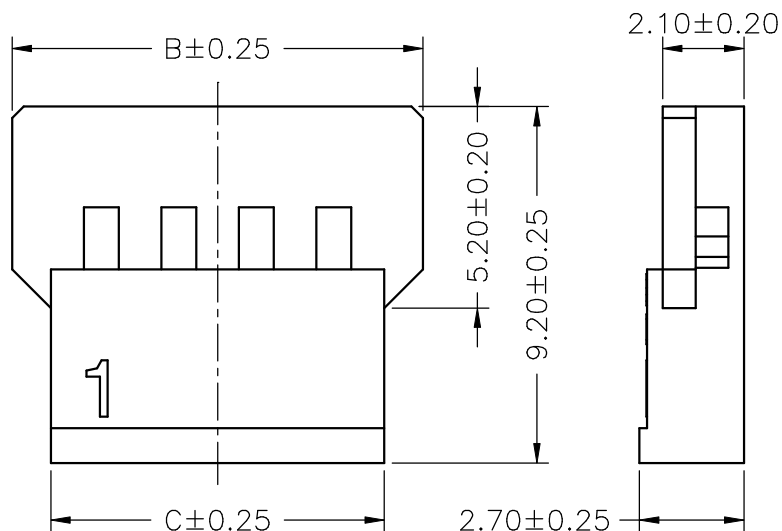
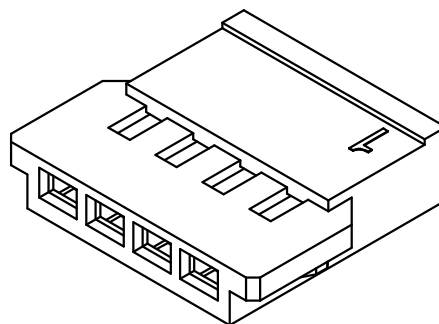


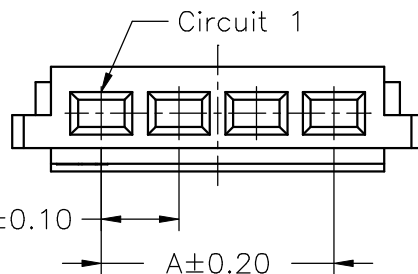

SPECIFICATIONS

Current Rating: 2A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 500V AC/minute




Material: Nylon 66,UL94V-0

Color: Natural(White)

Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
C2003HF-02P	2.00	6.60	4.60
C2003HF-03P	4.00	8.60	6.60
C2003HF-04P	6.00	10.60	8.60
C2003HF-05P	8.00	12.60	10.60
C2003HF-06P	10.00	14.60	12.60
C2003HF-07P	12.00	16.60	14.60
C2003HF-08P	14.00	18.60	16.60
C2003HF-09P	16.00	20.60	18.60
C2003HF-10P	18.00	22.60	20.60
C2003HF-11P	20.00	24.60	22.60
C2003HF-13P	24.00	28.60	26.60

			广瑞电子科技有限公司			
			UNIT	SCALE	SHEET	TITLE: 2.00mm PITCH HOUSING-RECEPTACLE
			mm		1 of 1	
			DRAWN BY		APPROVED BY	
			SUSAN		HENLY	
			2001.02.01		2001.02.01	
			GENERAL TOLERANCE			
B1	REVISE	2006.05.16	X. X±0.25		ANGLE±	
B0	NEW RELEASE	2005.12.13	X. XX±0.15			
REV.	DESCRIPTION	DATE	X. XXX±0.05			DRAW NO. : C2003HF-XP

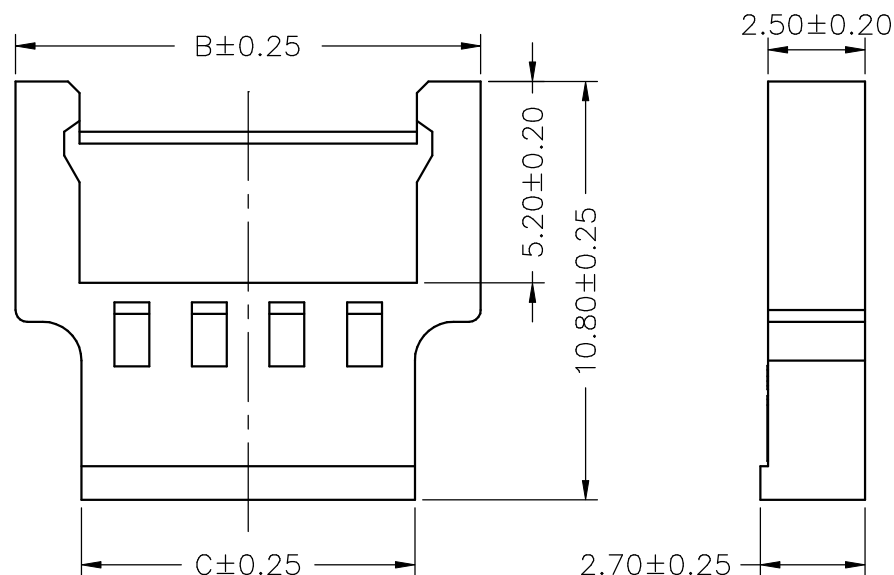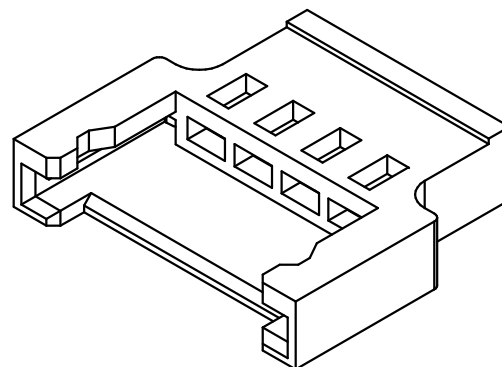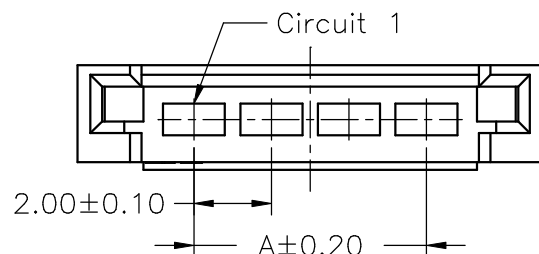

SPECIFICATIONS

Current Rating: 2A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 500V AC/minute




Material: Nylon 66,UL94V-0

Color: Natural(White)


Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
C2003HM-02P	2.00	8.00	4.60
C2003HM-03P	4.00	10.00	6.60
C2003HM-04P	6.00	12.00	8.60
C2003HM-05P	8.00	14.00	10.60
C2003HM-06P	10.00	16.00	12.60
C2003HM-07P	12.00	18.00	14.60
C2003HM-08P	14.00	20.00	16.60
C2003HM-09P	16.00	22.00	18.60
C2003HM-10P	18.00	24.00	20.60
C2003HM-11P	20.00	26.00	22.60
C2003HM-13P	24.00	30.00	26.60


			广瑞电子科技有限公司			
			UNIT	SCALE	SHEET	TITLE: 2.00mm PITCH HOUSING-PLUG
			mm		1 of 1	
			DRAWN BY SUSAN		APPROVED BY HENLY	
			2001.02.01		2001.02.01	
			GENERAL TOLERANCE			DRAW NO. : C2003HM-XP
B1	REVISE	2006.05.16	X. X±0.25		ANGLE±	
B0	NEW RELEASE	2005.12.13	X. XX±0.15			
REV.	DESCRIPTION	DATE	X. XXX±0.05			
						REV. B1

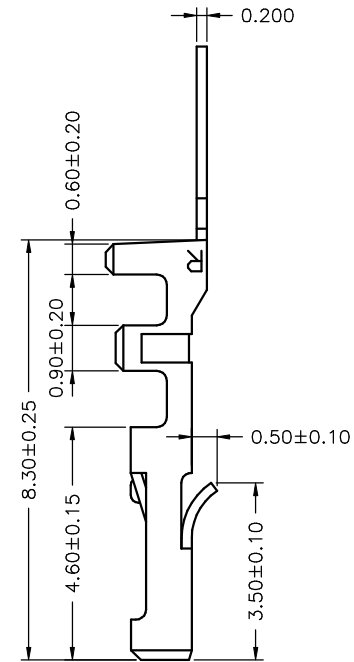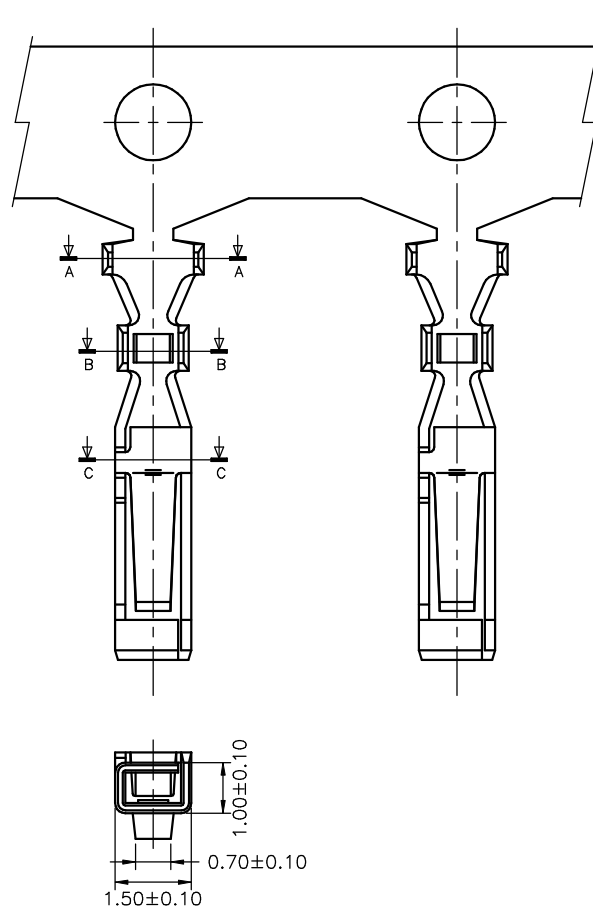

SEC:A-A



SEC:B-B






SEC:C-C

Ordering Information & Specifications


PART NO.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
C2003F-TBE	AWG#24-#28	1.15mm(max)	Brass	Tin-plated	10,000pcs

Note:E-Stamping before Tin-plated


			广瑞电子科技有限公司			
			UNIT	SCALE	SHEET	TITLE: 2.00mm PITCH CRIMP TERMINAL-FEMALE
			mm		1 of 1	
			DRAWN BY SUSAN		APPROVED BY HENLY	
			2001.02.01		2001.02.01	
			GENERAL TOLERANCE			
B1	REVISE	2006.05.16	X. X±0.25	ANGLE±		DRAW NO. : C2003F-XX
B0	NEW RELEASE	2005.12.13	X. XX±0.15			
REV.	DESCRIPTION	DATE	X. XXX±0.05			
						REV. B1

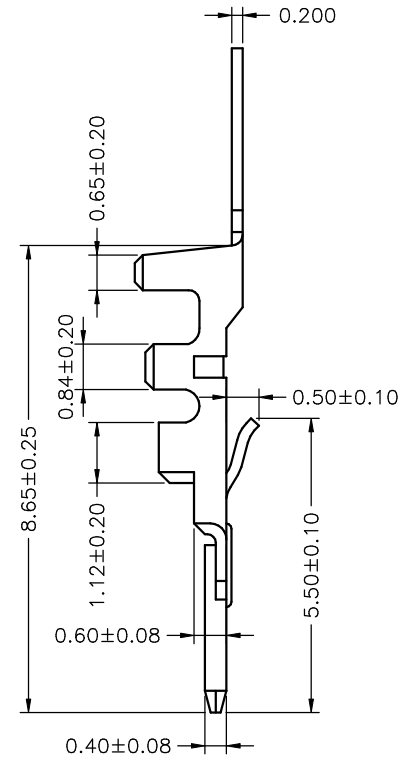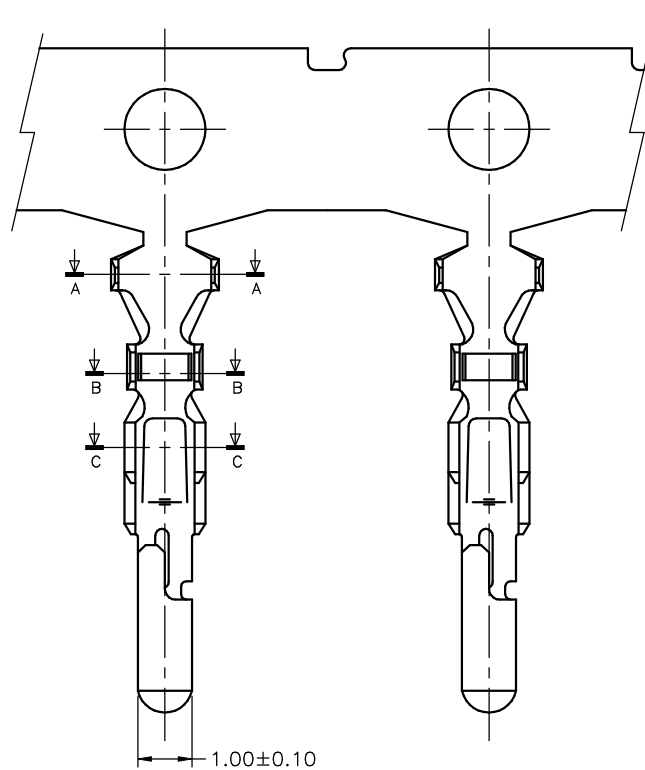

SEC:A-A



SEC:B-B



SEC:C-C

Ordering Information & Specifications

PART NO.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
C2003M-TBE	AWG#24-#28	1.15mm(max)	Brass	Tin-plated	10,000pcs

Note:E-Stamping before Tin-plated

			广瑞电子科技有限公司			
			UNIT	SCALE	SHEET	TITLE: 2.00mm PITCH CRIMP TERMINAL-MALE
			mm		1 of 1	
			DRAWN BY		APPROVED BY	
			SUSAN		HENLY	
			2001.02.01		2001.02.01	
B3	REVISE	2006.05.16	GENERAL TOLERANCE			DRAW NO. : C2003M-XX
B2	REVISE	2006.02.07				
B1	REVISE	2006.01.19	X. X±0.25	ANGLE±		
B0	NEW RELEASE	2005.12.13	X. XX±0.15			
REV.	DESCRIPTION	DATE	X. XXX±0.05			
						REV. B3