




1. 00mm Pitch wire to board connectors

■ SPECIFICATIONS

- Voltage rating: 50V AC/DC
- Current rating: 1A AC/DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 100MΩ Min.
- Temperature range: -25° C - +85° C
- Contact resistance: 20mΩ Max.

■ HOUSING

- Material: Nylon66 UL94V-0
- Q' TY: 1000 PCS/Bag

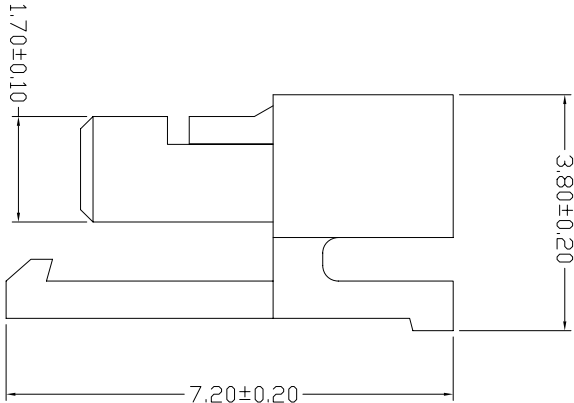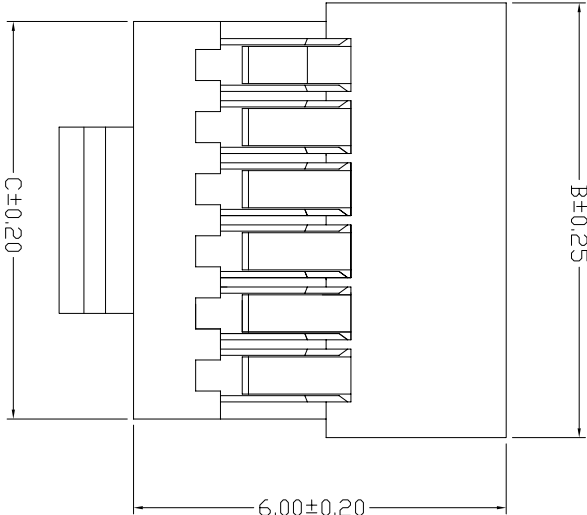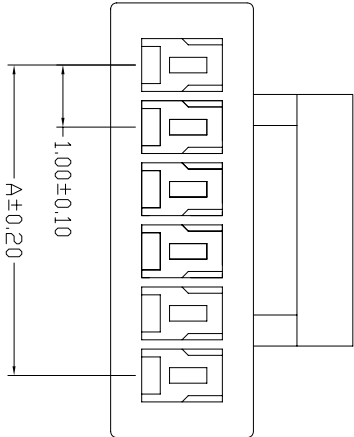

PART NO	Dimension mm		
	A	B	C
A1009HL-02P	1.00	3.00	2.40
A1009HL-03P	2.00	4.00	3.40
A1009HL-04P	3.00	5.00	4.40
A1009HL-05P	4.00	6.00	5.40
A1009HL-06P	5.00	7.00	6.40
A1009HL-07P	6.00	8.00	7.40
A1009HL-08P	7.00	9.00	8.40
A1009HL-09P	8.00	10.00	9.40
A1009HL-10P	9.00	11.00	10.40
A1009HL-11P	10.00	12.00	11.40
A1009HL-12P	11.00	13.00	12.40
A1009HL-13P	12.00	14.00	13.40
A1009HL-14P	13.00	15.00	14.40
A1009HL-15P	14.00	16.00	15.40
A1009HL-16P	15.00	17.00	16.40
A1009HL-17P	16.00	18.00	17.40
A1009HL-18P	17.00	19.00	18.40
A1009HL-19P	18.00	20.00	19.40
A1009HL-20P	19.00	21.00	20.40

广瑞电子科技有限公司	绘图 (DRAWN)		Susan		投影 (PROJECT)		公差 (TOLERANCE)		料号 (PART NO)		A1009HL-XP		页次 (PAGE)	
	审核 (CHECKED)		Henly		单位 (UNIT)		mm		图号 (DRAW NO)		GR-A1009HL-XP		1 / 1	
	批准 (APPROVE)				比例 (SCALE)		FIT		A					
					版本 (EDITION)		A		品名 (NAME)		1.00 PITCH HOUSING 带扣			
					日期 (DATE)		2011.2.23		0.000 ± 0.10					

Revision Data			
Item	Description	Date	Remark
B			




1. 00mm Pitch wire to board connectors

SPECIFICATIONS

- Voltage rating: 50V AC/DC
- Current rating: 1A AC/DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 100MΩ Min.
- Temperature range: -25° C - +85° C
- Contact resistance: 20mΩ Max.

HOUSING

- Poles: 2-20
- Material: PBT+15%G.F
- Q'TY: 1000 PCS/Bag

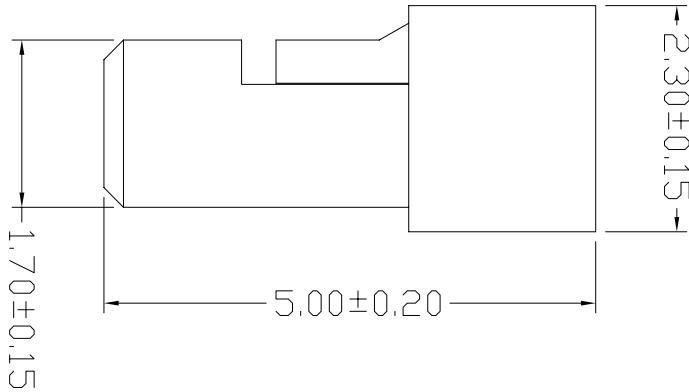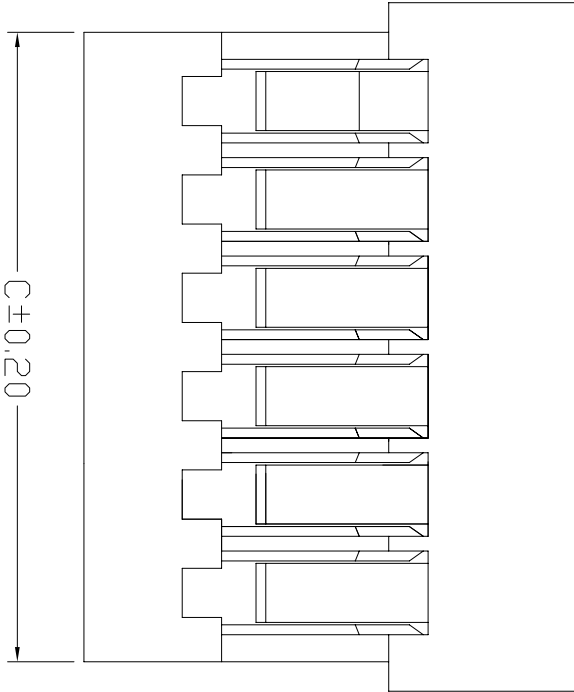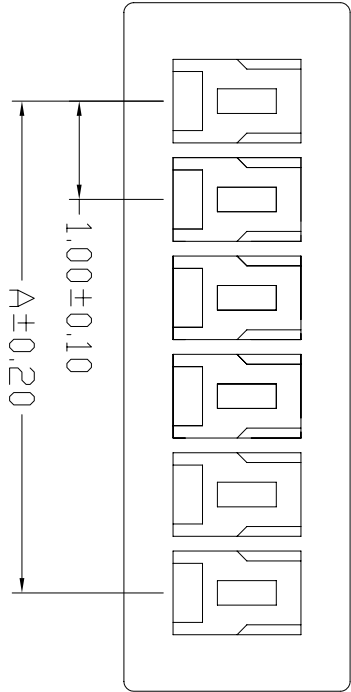

PART NO	Dimension mm		
	A	B	C
A1009H-02P	1.00	3.00	2.40
A1009H-03P	2.00	4.00	3.40
A1009H-04P	3.00	5.00	4.40
A1009H-05P	4.00	6.00	5.40
A1009H-06P	5.00	7.00	6.40
A1009H-07P	6.00	8.00	7.40
A1009H-08P	7.00	9.00	8.40
A1009H-09P	8.00	10.00	9.40
A1009H-10P	9.00	11.00	10.40
A1009H-11P	10.00	12.00	11.40
A1009H-12P	11.00	13.00	12.40
A1009H-13P	12.00	14.00	13.40
A1009H-14P	13.00	15.00	14.40
A1009H-15P	14.00	16.00	15.40
A1009H-16P	15.00	17.00	16.40
A1009H-17P	16.00	18.00	17.40
A1009H-18P	17.00	19.00	18.40
A1009H-19P	18.00	20.00	19.40
A1009H-20P	19.00	21.00	20.40

绘图 (DRAWN)	高 雷	投影 (PROJECT)			公差 (TOLERANCE)		料 号 (PART NO)	A1009H-XP	页 次 (PAGE)
		单位 (UNIT)	mm		0.0	± 2°			

审核 (CHECKED)		比例 (SCALE)	FIT	A	0.0	± 0.30	图 号 (DRAW NO)	GR-A1009H-XP	1 / 1
		版本 (EDITION)			0.00	± 0.20			

核准 (APPROVE)		日期 (DATE)	2011.2.23	0.000	± 0.10	品 名 (NAME)	1.00 PITCH HOUSING 无锁



1. 00mm Pitch wire to board connectors

SPECIFICATIONS

- Voltage rating: 50V AC/DC
- Current rating: 1A AC/DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 100MΩ Min.
- Temperature range: -35° C - +85° C
- Contact resistance: 30mΩ Max.

TERMINAL

- Thickness: 0.12mm
- Wire Range: AWG#28-#32
- Material: Phosphor bronze
- Finish: Tin Plated
- Qty: 20, 000PCS/Reel

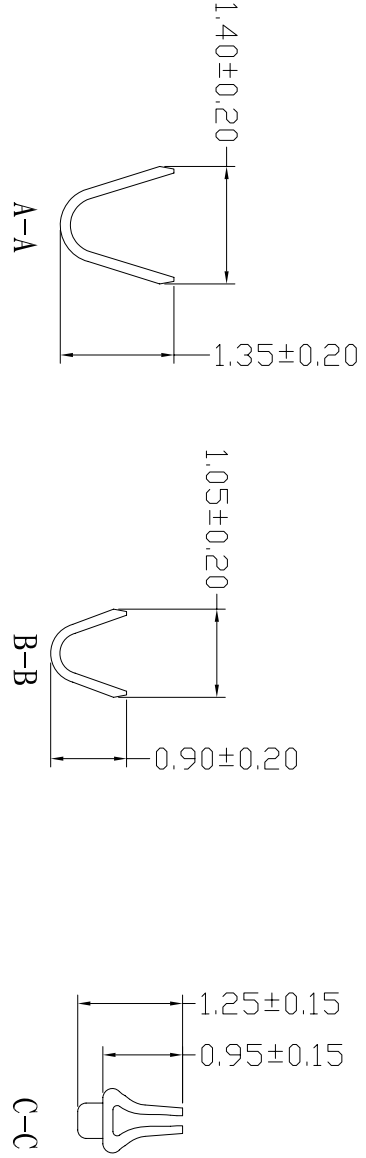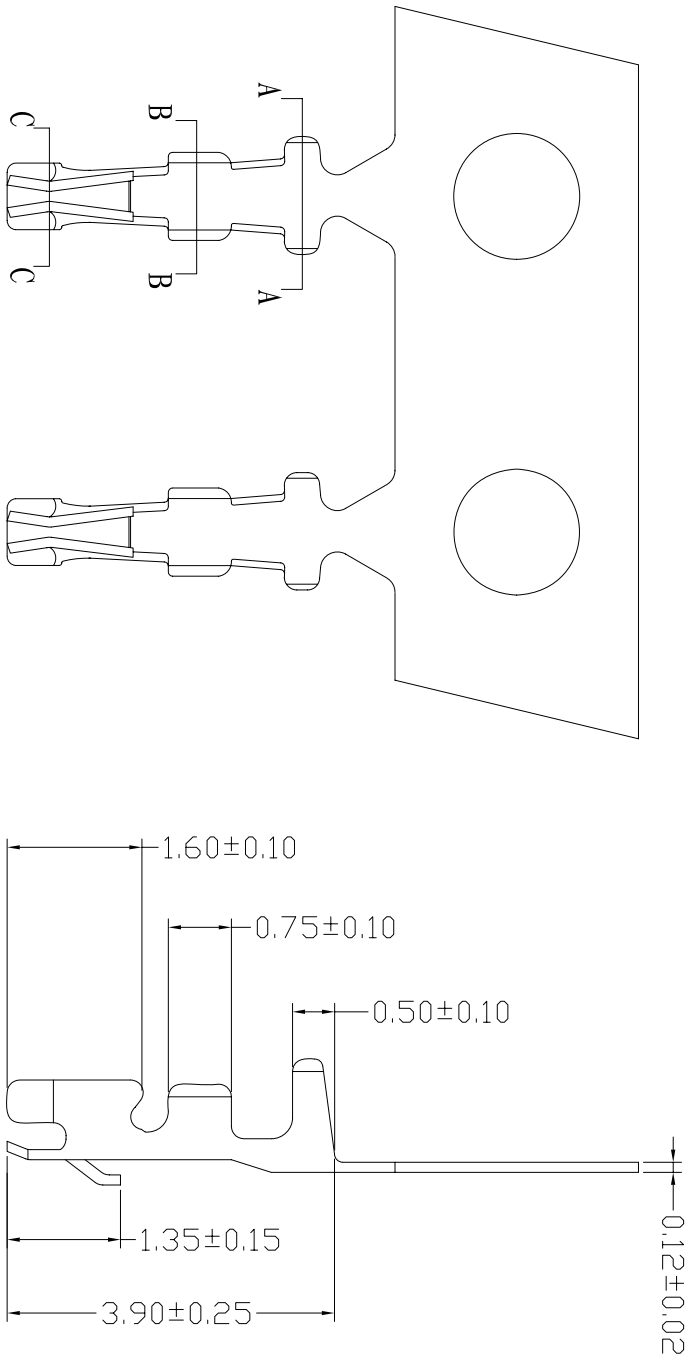

广瑞电子科技有限公司	绘图 (DRAWN)	Susan	投影 (PROJECT)		公差 (TOLERANCE)		料号 (PART NO)	A1009-TPE	页次 (PAGE)
	审核 (CHECKED)	Henly	单位 (UNIT)	mm	0.0	± 2°	图号 (DRAW NO)	GR-A1009-TPE	1 / 1
			比例 (SCALE)	FIT	0.0	± 0.30			
			版本 (EDITION)	A	0.00	± 0.20			
			日期 (DATE)	2011.2.23	0.000	± 0.10	品名 (NAME)		